



常州科霆紧固件有限公司
CHANGZHOU KYA FASTENERS CO.,LTD

TEL:0519-89886376


FAX:0086-0519-89196376

WEB: <http://www.kyafasteners.com/>

ADD:Room 606, 3rd Building, Rongsheng Manhattan Plaza,
Hengshan Road, Xinbei District, Changzhou, 213022 Jiangsu China.

CHANGZHOU KYA FASTENERS CO., LTD


KYA WIRE

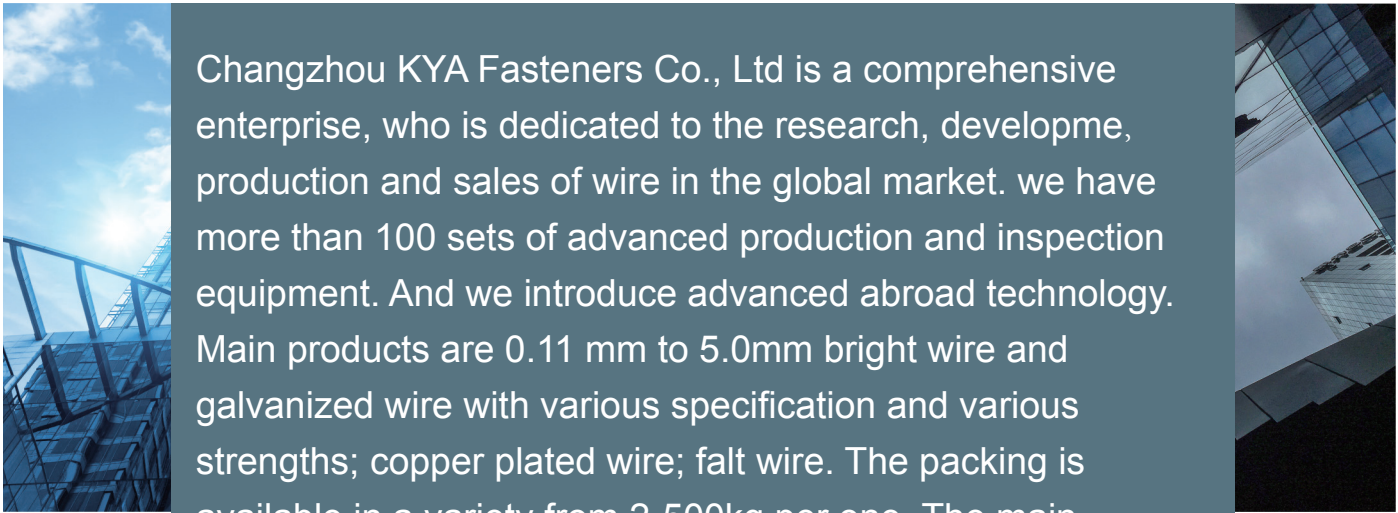

Changzhou KYA Fasteners Co., Ltd is a comprehensive enterprise, who is dedicated to the research, developme, production and sales of wire in the global market. we have more than 100 sets of advanced production and inspection equipment. And we introduce advanced abroad technology. Main products are 0.11 mm to 5.0mm bright wire and galvanized wire with various specification and various strengths; copper plated wire; falt wire. The packing is available in a variety from 2-500kg per one. The main products are stitching wire, staple wire, Nylon wire, wooden box nail wire, brush wire, netting wire, black annealed wire, phosphating steel wire, nail wire, spiral wire, heterotype wire, spring wire, carrier wire, hairpin wire, cleaning ball and other products. The products are mainly exported to Europe, America, Southeast Asia, South America and other developed countries and regions, and have been highly trusted and



Stitching Wire

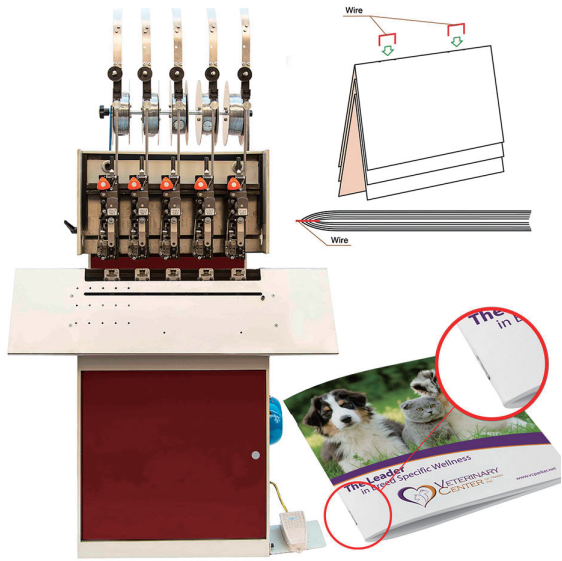

Details

Size : 0.40-0.45-0.50-0.55-0.60-0.65-0.70-0.75 -0.80-0.90-1 .0mm.
Tolerance : ± 0.01 mm.
Tensile strength: 925-1200MPA. Zinc coating : 8-16g/m2. Packing : 2-500kg/spool.
Used for making staples. papercilp . material wire for binding paper and books.

Wire	German Wire	m/kg	ASWG	m/kg	ft/LBS	BWG	m/kg	ft/LBS
Gauge	(mm)		(mm)			(mm)		
21	0.8	253	0.81	247	368	0.81	247	368
22	0.75	288	0.73	304	452	0.71	322	479
23	0.65	331	0.65	384	571	0.63	409	609
24	0.6	451	0.58	482	717	0.56	517	769
25	0.55	536	0.52	600	893	0.51	624	929
26	0.5	649	0.46	767	1141	0.46	767	1141
27	0.45	801	0.44	838	1247	0.41	965	1436
28	0.4	1014	0.41	965	1436	0.36	1252	1863
29	0.37	1185	0.38	1123	1671	0.33	1489	2216
30	0.35	1324	0.36	1252	1863	0.3	1802	2682



Brush Wire

Details

Size : 0.15-0.20-0.30-0.35-0.45-0.60
 -0. 70-0.80-0.90-1.0-1.2-1.4-1.5
 -5.0mm.
 Tensile strength : 700-900/1900-2100MPA
 Zinc coating : 10-25g/m2 .
 Packing: coil. spool.
 Application:
 Used for making Industrial brushes,
 steel brushes, cleaning brushes, etc.




Staple Wire

Details

Size: 0.43-0.48-0.58-0.65-0.72-0.88
 -1.18-1.52-1.6-1.72-1.83-2.0mm
 Tensile strength : 900-1200Mpa
 Zinc coating : 8-16g/m2
 Packing: coil. spool
 Application:
 Used for making industrial nails,
 cultural and educational nails, etc.

Spools

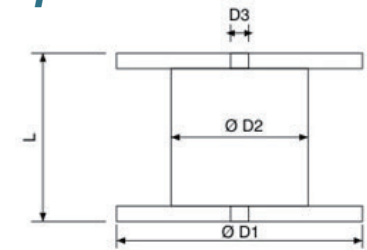

	Type	D ₁	D ₂	D ₃	L
	2 kg	135 mm	55 mm	16 mm	50 mm
	3 kg	155 mm	55 mm	18 mm	50 mm
	4 kg	155 mm	65 mm	18 mm	65 mm
	4 kg	152 mm	89 mm	16 mm	110 mm
	15 kg	300 mm	210 mm	51 mm	102 mm
	45 kg	355 mm	224 mm	36 mm	200 mm
	90 kg	355 mm	220 mm	125 mm	355 mm
	500 kg	600 mm	340 mm	80 mm	570 mm



Flat Wire



Details

Size: 2.50mmx0.50mm.
 2.20mmx0.60mm.
 2.20mmx0.70mm.
 1.80mmx0.60mm.
 1.50x0.50mm.
 0.90mmx0.60mm.
 0.80x0.50mm etc.
 Tensile strength: 700-900Mpa,
 1000-1200Mpa .
 Tolerance: ±0.05mm .
 Surface: Galvanized or copper.
 Application:
 Used for binding cartons, etc.

ISWG Wire Gauge	Size/inch	Size/mm	Metres/kg	Feet/kg	Feet/lb
12x22	.103x.028	2.50x0.70	80	255	116
12x23	.103x.023	2.50x0.60	90	295	134
12x24	.103x.022	2.50x0.55	100	320	146
12x25	.103x.020	2.50x0.50	110	370	168
12x26	.103x.017	2.50x0.43	115	380	173
13x25	.092x.020	2.35x0.50	120	385	175
14x25	.080x.020	2.03x0.50	195	640	291
14x20	.074x.037	1.93x0.95	70	230	100
17x24	.060x.024	1.47x0.60	220	840	478
17x25	.060x.020	1.47x0.50	230	830	472
17x26	.060x.017	1.47x0.43	240	840	473
17x25	.056x.020	1.42x0.50	220	850	479
18x20	.047x.035	1.20x0.90	270	932	319
20x24	.035x.023	0.90x0.60	290	945	429
21x25	.035x.020	0.80x0.50	360	1190	360



THE UTILITIES SECTOR

KYA metal products can fully meet your needs in the industrial field. Various indicator requirements to help you produce a perfect-selling filter. Spring, steel wool, steel nails, etc.





Galvanized Steel Wire For Filter Mesh

Details

Size : 0.15-1.0mm.

Tensile strength : 300-500Mpa , 700-900Mpa .

Packing: spool.



Patented Steel Wire

Details

Size : 1.5-6.0mm .

Tensile strength : 1000-1300Mpa , 1500-2300Mpa .

Surface: galvanized or phosphated .

Packing: coil. spool .



Steel Wool Wire

Details

Size : 1.6-5.0mm .

Tensile strength : 700-900Mpa.

Surface: bright.

Packing: coil.



Nail Galvanized Wire

Details

Size : 1.6-5.0mm .

Tensile strength : 800-1150Mpa .

Surface : zinc/zn-5%al/zn-10%al .

Zinc coating : 8-16g / m2 .

packing: spool,45-500kg.



Car Seal Strip Wire

Details

Size : 0.50-0.75-0.78-0.90mm .

Tensile strength : 950-1150Mpa .

Surface: galvanized.

Packing: spool.

Bright Annealed Wire For Airbag

Details

Size : 0.2-0.9mm .

Tensile strength : 300-400Mpa , 600-800Mpa .

Packing: Coil. spool.



Galvanized Wire For Automotive Exhaust Muffler

Details

Size : 0.2-0.3-0.4-0.6-0.8-0.9mm .

Tensile strength : 600-800Mpa .

Surface: bright.

packing: spool.



Steel Wire For Control Cable

Details

Size : 0.3-3.0mm


Tensile strength : 1300-1900Mpa

Surface : galvanized or phosphated

Zinc coating : 8-16g / m2

Packing: coil ,spool, z2, z3

Standard: EN10264-2,GB/T4357, etc

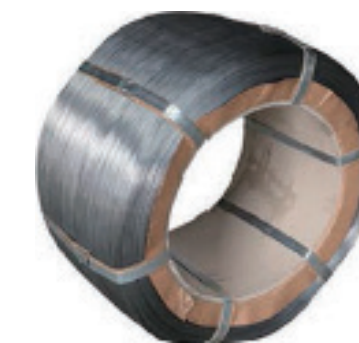



Nylon Wire

Details

Color: White black and red, orange, yellow, green, dragonhead purple, etc.

Size : 0.45-1.50mm .

Tensile strength : 550-750Mpa , 930-1150Mpa .

Packing: spool.



Galvanized Drawing Wire

Details

Size: 0.11-0.13-0.16-0.18-0.20-0.25-0.30-0.35-0.40mm.

Tensile strength : 900-1120Mpa .

Surface : galvanized or bright .

Packing: spool.



Handle Wire

Details

Size : 2.6-3.15-3.65-4.0mm .

Tensile strength : 650-850Mpa.

Surface: galvanized.

Packing: coil .



Coathanger Wire

Details

Size : 1.6-1.8-2.0-2.2mm.

Tensile strength : 700-900Mpa.

Surface : galvanized.

packing: coil .

Black Annealed Wire

Details

Size: 0.8-1.0-1.2-1.6-1.8-2.0-2.7-3.0-4.0mm

Tensile strength : 300-400Mpa, 400-500Mpa

Packing: coil, 1-500kg



Rebar Tie Wire

Details

Diameter:0.8MM

Length:95M

Net weight:0.4kg/ reel


Material Code:Q195, Galvanized Wire

Wire Tensile Strength:420m/Pa

Wire Yield Strength:330m/Pa

Tensile Strength:42-47 KG/CM2

Elongation: 21%

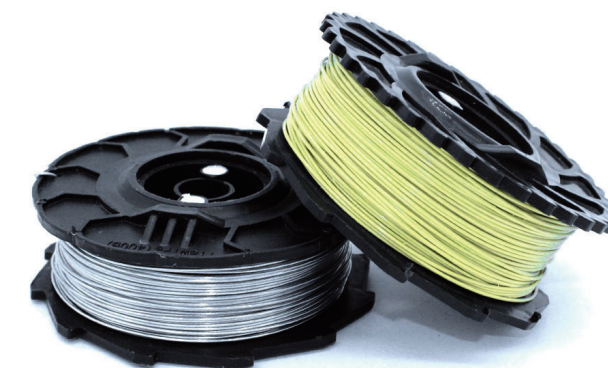

Steel Fiber Wire

Details

Size:0.45-1.2mm.

Tensile strength:800-1200Mpa.

Surface:Galvanized or bright.

Packing:Spool.

