

OPERATION MANUAL

Read the instructions carefully before operating it make sure all the switches are off.
操作前请仔细阅读使用说明并确保所有开关处于关闭状态



Torque Dial
扭矩刻度盘

Set the Main switch (e) at "OFF", the Trigger lock at "LOCK" and remove the Battery pack.
请关闭电源与扳机开关并卸下电池。



Press the Release button of this tool, and confirm that the Release button is caught in the Release stopper.
向上推动红色按钮并确保被扣住。




Rotate the Magazine stopper 45° counterclockwise. Stretch out the tip of the wound Tiewire. Open the Magazine cover and set the Tiewire in the Magazine with the Holding slot side of the reel facing up.
逆时针旋转卡扣并打开外盖。拉直铁丝，将线盘固定面朝上放入盖中。

OPERATION MANUAL

Read the instructions carefully before operating it make sure all the switches are off.
操作前请仔细阅读使用说明并确保所有开关处于关闭状态



Grasp the tool with the left hand, hold the tip of the wire with the right hand. Remove the tip of the wire from the holding slot. Straighten out the tip of the wire, and insert the twisted wire into the Wire guide parallel.
将拉直的铁丝从喇叭口插入到齿轮导丝器内，关上外盖扣上卡扣，摁压圆形红色按钮复位。

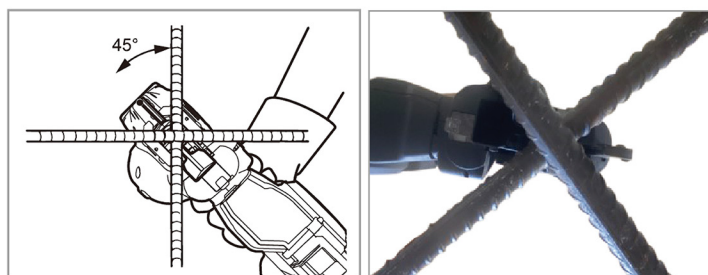

Tilt the tool 45° angle to the crossed rebars.
使用时机器与钢筋相交处呈45°角



Apply the tool perpendicularly to the surface of the crossed.
使用时机器垂直于钢筋交叉的一面。

REBAR TWIN TIER



- DOUBLE THE SPEED
- COST SAVINGS
- SHORTER TIE HEIGHT
- HEALTH BENEFITS

CHANGZHOU KYA FASTENERS CO.,LTD

Room 606, 3rd Building, Rongsheng Manhattan Plaza, Hengshan Road, Xinbei District, Changzhou, Jiangsu China.

Tel.: 0086-519-8988 6376

Fax: 0086-519-8919 6376

www.kyafasteners.com



MADE IN CHINA

SPECIFICATIONS 规格

Model No.型号	KYA-460	KYA-660
Max Tying Diameter 最大捆扎直径	46mm	66mm
Voltage & Capacity 电池参数	DC18V(5.0AH)	DC18V(5.0AH)
Tying Speed 捆扎速度	Approx. 0.6sec 大约0.6秒	Approx. 0.6sec 大约0.6秒
Ties per Coil 每卷铁丝捆扎数	Approx.260 ties (1turns) 大约260次	Approx.260 ties (1turns) 大约260次
Ties per Charge 续航	Over 4600 ties 超过4600次	Over 4600 ties 超过4600次
Charge Time 充电时间	Approx.70mins 大约70分钟	Approx.70mins 大约70分钟
Wire Diameter 铁丝直径	1.0mm	1.0mm
Net Weight 净重	2.3kgs	2.3kgs
Dimension (L)×(W)×(H) 尺寸	350*120*300mm	350*120*300mm

Standard Equipment 配件



Battery 电池

KYA-4SX(Li-ion)

Voltage & Capacity 容量
DC 18V(5.0Ah)

Charge Time 充电时间
Approx. 70 minutes

Charger 充电器

KYA-4A

Charger Current 充电电流
4A

Charger Voltage 充电电压
110V-240V

Frequency 频率
50/60HZ



APPLICABLE REBAR SIZE

适用钢筋尺寸

*2 rebars combination

Minimum

10mm x 10mm (#3 x #3)

Maximum

22mm x 22mm (#7 x #7)

25mm x 19mm (#8 x #6)



*3 rebars combination

Minimum

10mm x 10mm x 10mm(#3 x #3 x #3)

Maximum

22mm x 16mm x 16mm (#7 x #5 x #5)

25mm x 13mm x 13mm (#8 x #4 x #4)



*4 rebars combination

Minimum

10mm x 10mm x 10mm x 10mm
(#3 x #3 x #3 x #3)

Maximum

16mm x 16mm x 13mm x 13mm
(#5 x #5 x #4 x #4)



TIE WIRES 线盘

Black Annealed, Galvanized Color, Poly-Coated Color

黑色退火, 镀锌, 镀塑



Wire Diameter		1.0mm
Type of Wire		Black Annealed wire
Ties/Coil	10mm x 10mm (#3 x #3)	Approx.260 ties
	13mm x 13mm (#4 x #4)	Approx.240 ties
	22mm x 16mm x 16mm (#7 x #5 x #5)	Approx.170 ties

Wire Diameter		1.0mm
Type of Wire		Galvanized wire
Ties/Coil	10mm x 10mm (#3 x #3)	Approx.260 ties
	13mm x 13mm (#4 x #4)	Approx.240 ties
	22mm x 16mm x 16mm (#7 x #5 x #5)	Approx.170 ties



Wire Diameter		1.0mm
Type of Wire		Poly-Coated wire
Ties/Coil	10mm x 10mm (#3 x #3)	Approx.230 ties
	13mm x 13mm (#4 x #4)	Approx.210 ties
	22mm x 16mm x 16mm (#7 x #5 x #5)	Approx.150 ties

